



# ACMH Series Wide Terminal Metal Alloy Low-Resistance Resistor Product Specifications

Document No.	IE-SP-101
Released Date	2021/01/01
Page No.	1

## 1 Scope:

- 1.1 This specification is applicable to lead free and halogen free of RoHS directive for ACMH series wide terminal metal alloy low-resistance resistor
- 1.2 The product is for general electronic purpose.

## 2 Explanation Of Part Numbers:

<u>ACMH</u>	<u>0508</u>	-	<u>2</u>	<u>2</u>	<u>R003</u>	<u>F</u>	<u>4</u>

Type	Size (inch)	Number of Terminals	Rated Power	Resistance (4 ~6Digits)	Tolerance	Packaging
Low-Inductance Metal Alloy Low Resistance Resistor	0508 0612	2: 2 terminals	1=1.0 W	EX: R005 = 5 mΩ R010 = 10 mΩ R00075 = 0.75mΩ	F=±1.0% G=±2.0% J=±5.0%	4=4,000pcs 5=5,000pcs

## 3 Product Specifications:

Type	# of Terminals	Max. Rating Power	Rating Current	Overload Current	T.C.R. (ppm/°C)	Inductance	Resistance Range (mΩ)	Operating Temperature Range
							F (±1%) G (±2%) J (±5%)	
0508	2	1.0W	$I_r = \sqrt{P/R}$	$I_o = \sqrt{4P/R}$	$\leq \pm 50$	< 5nH	$2 \leq R \leq 4$	-55~+150°C
0612	2	1.0W			$\leq \pm 100$	< 5nH	$1 \leq R \leq 4$	

$I_r$ =Rating Current(A)

$I_o$ = Overload Current(A)

P= Rating Power(W)

R=Resistance(Ω)

<b>IE</b>			<b>QA</b>		<b>Remark</b> IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. Do not copy without permission	Issue Dep.DATA Center.  Series No. <b>60</b>
Written	Checked	Approved	Signing			



**ACMH Series Wide Terminal Metal Alloy  
Low-Resistance Resistor Product  
Specifications**

Document No.

IE-SP-101

Released Date


2021/01/01

Page No.

2

**3.1 Power Derating Curve: Operating Temperature Range: - 55 ~+150 °C**

For resistors operated in ambient temperatures 70°C, power rating shall be derated in accordance with the curve below:

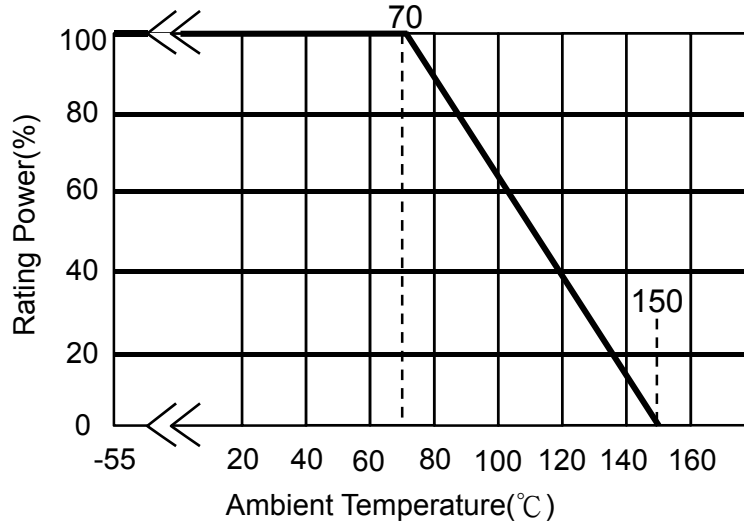

**3.2 Rating Current:**

Rated Current: The resistor shall have a DC continuous working current or a RMS(Root Mean Square). AC continuous working current at commercial-line frequency and wave form corresponding to the power rating, as determined from the following:

Remark:

$$I = \sqrt{P/R}$$

I=Rating Current(A)  
P= Rating Power(W)  
R=Resistance(Ω)

Remark


IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**

**4 Physical Dimensions:**

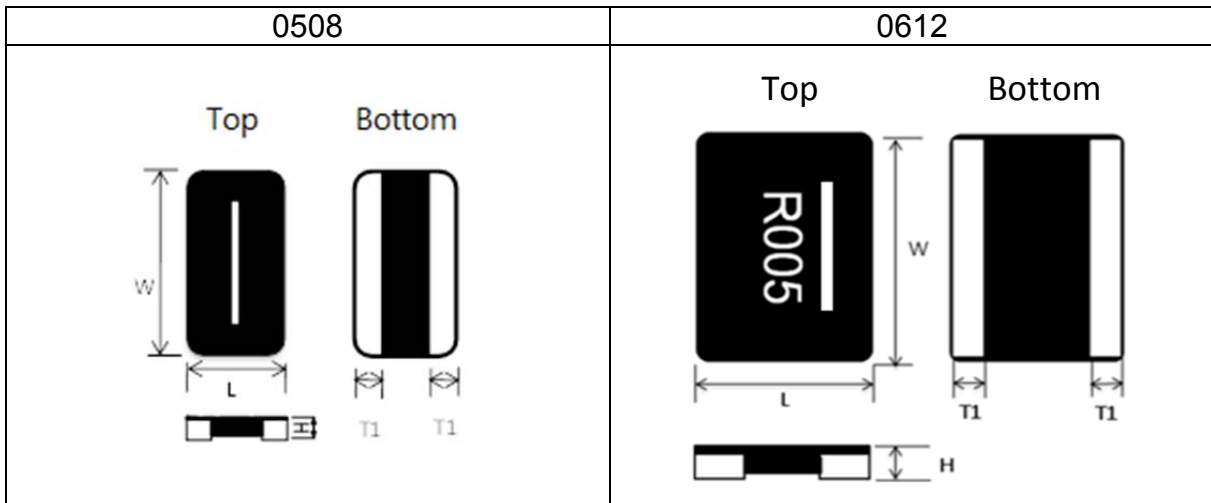

Type	Maximum Power Rating (Watts)	Resistance Range (mΩ)	Dimensions - in inches (millimeters)			
			L	W	H	T1
0508	1	2~4	0.05±0.008 (1.270±0.20)	0.05±0.008 (2.032±0.20)	0.014±0.004 (0.35±0.10)	0.014±0.006 (0.35±0.15)
0612	1	1~4	0.063±0.008 (1.60±0.20)	0.126±0.008 (3.20±0.20)	0.014±0.004 (0.35±0.10)	0.014±0.006 (0.35±0.15)

**4.1 Material of Alloy:**

Type	Watts	Material	Resistance
ACMH0508	1W	Copper-Manganese Alloy	2mΩ ≤ R ≤ 4mΩ
ACMH0612	1W	Copper-Manganese Alloy	1mΩ ≤ R ≤ 4mΩ

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**



**ACMH Series Wide Terminal Metal Alloy  
Low-Resistance Resistor Product  
Specifications**

<b>Document No.</b>	<b>IE-SP-101</b>
<b>Released Date</b>	<b>2021/01/01</b>
<b>Page No.</b>	<b>4</b>

**5 Reliability Performance:**

**5.1 Electrical Performance:**

Test Item	Conditions of Test	Test Limits									
Temperature Coefficient of Resistance (TCR)	<ul style="list-style-type: none"> <li>TCR (ppm/°C) = <math>\frac{(R2-R1)}{R1 (T2-T1)} \times 10^6</math></li> <li>R1: resistance of room temperature</li> <li>R2: resistance of 150 °C</li> <li>T1: Room temperature</li> <li>T2: Temperature at 150 °C</li> <li>Refer to JIS C 5201-1 4.8</li> </ul>	Refer to Paragraph 3. general specifications									
Short Time Overload	Applied Overload for 5 seconds and release the load for about 30 minutes, then measure its resistance variance rate. (Overload condition refer to below): <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Type</th> <th>Power (W)</th> <th># of rated power</th> </tr> </thead> <tbody> <tr> <td>0508</td> <td>1.0</td> <td>4 times</td> </tr> <tr> <td>0612</td> <td>1.0</td> <td>4 times</td> </tr> </tbody> </table> Refer to JIS C 5201-1 4.13	Type	Power (W)	# of rated power	0508	1.0	4 times	0612	1.0	4 times	0508: ≤ ±0.5% 0612: ≤ ±1.0% No evidence of mechanical damage
Type	Power (W)	# of rated power									
0508	1.0	4 times									
0612	1.0	4 times									
Insulation Resistance	Put the resistor in the fixture, add 100 VDC in +, - terminal for 60secs then measured the insulation resistance between electrodes and insulating enclosure or between electrodes and base material. Refer to JIS-C5201-1 4.6	≥ 10 <sup>8</sup> Ω									
Dielectric Withstanding Voltage	Applied 300VAC for 1 minute, and Limit surge current 50 mA (max.) Refer to JIS-C5201-1 4.7	No short or burned on the appearance.									

**5.2 Mechanical /Constructional Performance:**

Test Item	Conditions of Test	Test Limits
Resistance to Solder Heat	The tested resistor be immersed 25 mm/sec into molten solder of 260±5°C for 10±1secs. Then the resistor is left in the room for 1 hour, and measured its resistance variance rate. Refer to JIS-C5201-1 4.18	≤ ±0.5% No evidence of mechanical damage
Solderability	Add flux into tested resistors, immersion into solder bath in temperature 245±5°C for 3±0.5secs. Refer to JIS-C5201-1 4.17	Solder coverage over 95%
Vibration	The resistor shall be mounted by its terminal leads to the supporting terminals on the solid table. The entire frequency range :from 10 Hz to 55 Hz and return to 10 Hz, shall be transferred in 1 min. Amplitude : 1.5mm This motion shall be applied for a period of 4 hours in each 3 mutually perpendicular directions (a total of 12hrs) Refer to JIS-C5201-1 4.22	≤ ±0.5% No evidence of mechanical damage
Resistance to solvent	The tested resistor be immersed into isopropyl alcohol of 20~25°C for 60secs, then the resistor is left in the room for 48 hrs. Refer to JIS-C5201-1 4.29	≤ ±0.5% No evidence of mechanical damage

<b>Remark</b>	<div style="border: 1px solid black; padding: 5px; display: inline-block;">           IT'S NOT UNDER CONTROL FOR PDF FILE            PLS NOTE THE VERSION STATED..         </div>	Issue Dep. <b>DATA Center.</b>
	Do not copy without permission	Series No. <b>60</b>



## ACMH Series Wide Terminal Metal Alloy Low-Resistance Resistor Product Specifications

<b>Document No.</b>	<b>IE-SP-101</b>
<b>Released Date</b>	<b>2021/01/01</b>
<b>Page No.</b>	<b>5</b>

### 5.3 Environmental Performance:

Test Item	Conditions of Test	Test Limits						
Low Temperature Exposure (Storage)	Put the tested resistor in chamber under temperature $-55\pm 2^{\circ}\text{C}$ for 1,000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to JIS-C5201-1 4.23.4	$\leq \pm 0.5\%$						
		No evidence of mechanical damage						
High Temperature Exposure (Storage)	Put tested resistor in chamber under temperature $150\pm 5^{\circ}\text{C}$ for 1,000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to JIS-C5201-1 4.23.2	$\leq \pm 1.0\%$						
		No evidence of mechanical damage						
Temperature Cycling (Rapid Temperature Change)	Put the tested resistor in the chamber under the temperature cycling which shown in the following table shall be repeated 300 times consecutively. Then leaving the tested resistor in the room temperature for 60 minutes, and measure its resistance variance rate. <table border="1" style="margin: 5px auto; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">Testing Condition</th> </tr> <tr> <td style="text-align: center;">Lowest Temperature</td> <td style="text-align: center;"><math>-55 +0/-10^{\circ}\text{C}</math></td> </tr> <tr> <td style="text-align: center;">Highest Temperature</td> <td style="text-align: center;"><math>150 +10/-0^{\circ}\text{C}</math></td> </tr> </table> Refer to JIS-C5201-1 4.19	Testing Condition		Lowest Temperature	$-55 +0/-10^{\circ}\text{C}$	Highest Temperature	$150 +10/-0^{\circ}\text{C}$	$\leq \pm 1.0\%$
		Testing Condition						
		Lowest Temperature	$-55 +0/-10^{\circ}\text{C}$					
		Highest Temperature	$150 +10/-0^{\circ}\text{C}$					
		No evidence of mechanical damage						
Moisture Resistance (Climatic Sequence)	Put the tested resistor in chamber and subject to 10 cycles of damp heat and without power. Each one of which consists of the steps 1 to 7 (Figure 1). Then leaving the tested resistor in room temperature for 24 hr, and measure its resistance variance rate. Refer to MIL-STD 202 Method 106	$\leq \pm 0.5\%$						
		No evidence of mechanical damage						
Bias Humidity	Put the tested resistor in chamber under $85\pm 5^{\circ}\text{C}$ and $85\pm 5\% \text{RH}$ with 10% bias and load the rated voltage for 90 minutes on, 30 minutes off, total 1,000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to JIS-C5201-1 4.24	$\leq \pm 1.0\%$						
		No evidence of mechanical damage						

### 5.4 Operational Life Endurance:

Test Item	Conditions of Test	Test Limits
Load Life	Put the tested resistor in chamber under temperature $70\pm 2^{\circ}\text{C}$ and load the rated voltage for 90 minutes on 30 minutes off, total 1000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to JIS-C5201-1 4.25	$\leq \pm 1.0\%$
		No evidence of mechanical damage

<b>Remark</b>	<div style="border: 1px solid black; padding: 5px; display: inline-block;">           IT'S NOT UNDER CONTROL FOR PDF FILE            PLS NOTE THE VERSION STATED..         </div>	Issue Dep. <b>DATA Center.</b>
	Do not copy without permission	Series No. <b>60</b>



# ACMH Series Wide Terminal Metal Alloy Low-Resistance Resistor Product Specifications

Document No.


IE-SP-101

Released Date

2021/01/01

Page No.

6

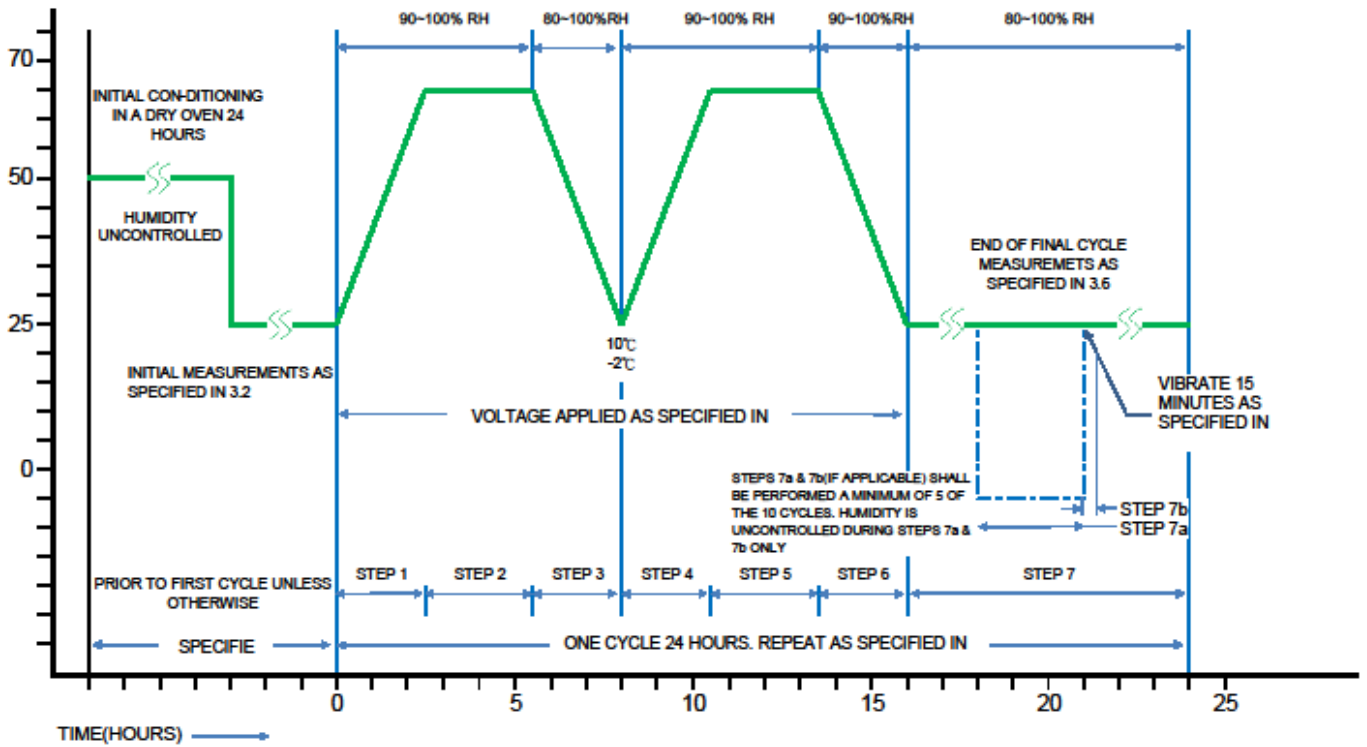

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**


## 6 Marking Format:









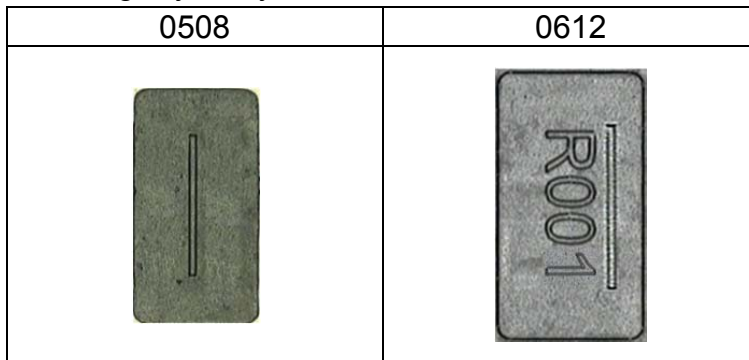



6.1 Product resistance is indicated by using two marking notation styles:

- a. "R" designates the decimal location in ohms, e.g.
  - For 1mΩ the product marking is R001;
  - For 7mΩ the product marking is R007;
- b. "m" designates the decimal location in milliohms, e.g.
  - For 0.25mΩ the product marking is 0m25;
  - For 0.5mΩ the product marking is 0m50;
  - For 5.5mΩ the product marking is 5m50;



## 6.2 Marking Styles by Laser:



Marking Type	R	m	1	2	3	4	5	6	7	8	9	0
0612												

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**

**7 Plating Thickness:**


7.1 Ni :  $\geq 2 \mu m$



7.2 Sn(Tin) :  $\geq 3 \mu m$

7.3 Sn(Tin) : Matte Sn

**8 Measurement Point :**

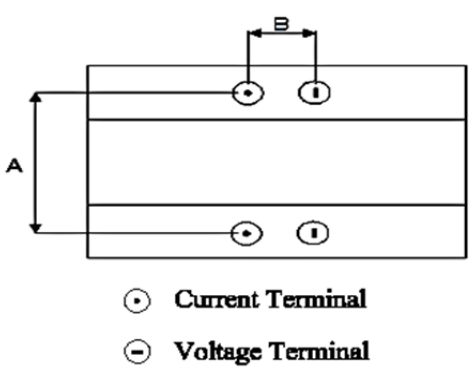
Bottom electrode		Unit : mm	
TYPE	DIM	A	B
		<b>0508</b>	0.90±0.05
<b>0612</b>		1.20±0.05	0.46±0.05



 **Current Terminal**  
 **Voltage Terminal**

**9 Taping specifications:**

9.1 Tape Dimensions:

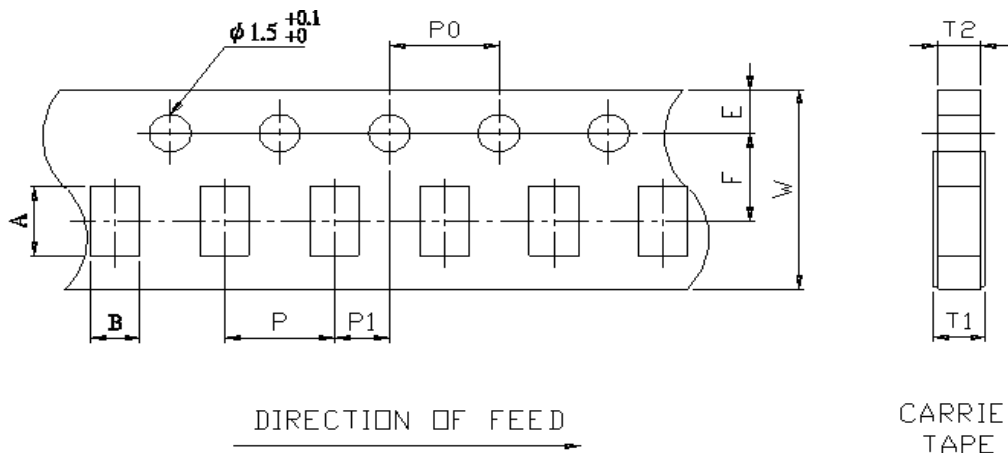

Unit: mm

DIM / Item	A	B	W	E	F	T1	T2	P	P0	10*P0	P1
0508	2.30±0.10	1.55±0.10	8.0±0.20	1.75±0.10	3.5±0.05	0.40+0.2/-0	0.40±0.10	4.0±0.10	4.0±0.10	40.0±0.20	2.0±0.05
0612	3.50±0.20	1.90±0.20	8.0±0.20	1.75±0.10	3.5±0.05	0.60+0.2/-0	0.60±0.05	4.0±0.10	4.0±0.10	40.0±0.20	2.0±0.05

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**






**ACMH Series Wide Terminal Metal Alloy  
Low-Resistance Resistor Product  
Specifications**

Document No.	IE-SP-101
Released Date	2021/01/01
Page No.	9

9.2 Packaging model:

Type	Tape width	Max. Packaging Quantity (pcs/reel)
		Carrier Tape 4mm pitch
0508	8mm	5,000pcs
0612	8mm	5,000pcs

9.3 Reel Dimensions:

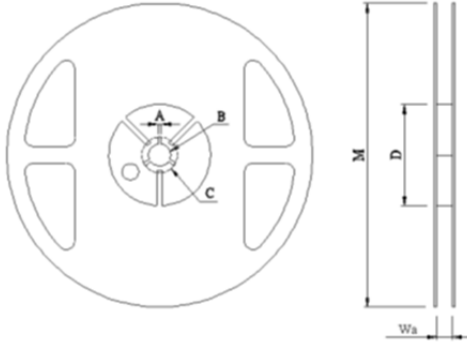

Unit: mm

Reel Type / Tape	W	M	A	B	C	D
7" reel for 8 mm tape	12.00±0.5	178±1.0	2.0±0.5	13.2±0.5	17.7±0.5	60.0±1.0

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep. **DATA Center.**

Do not copy without permission


Series No. **60**

**10 Technical application notes: (This is for recommendation, please customer perform adjustment according to actual application)**


10.1 Recommend soldering method:

10.1.1 This product is applicable to IR-reflow process only.(Infrared Reflow)

10.1.2 Typical examples of soldering processes that provides reliable joints without any damage are given in below:

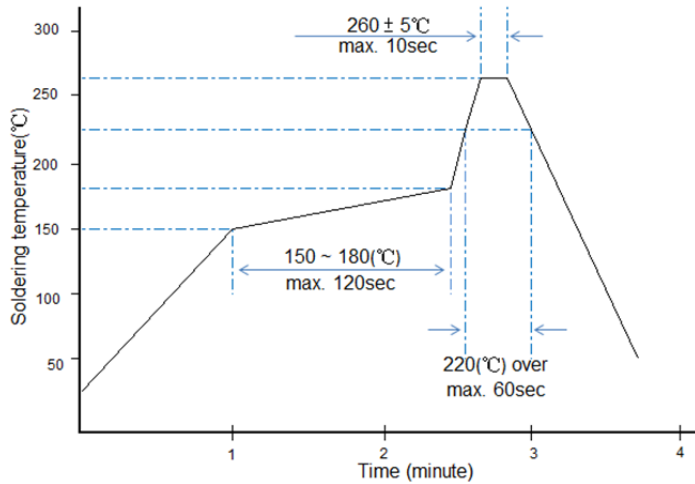

Recommended IR Reflow Soldering Profile

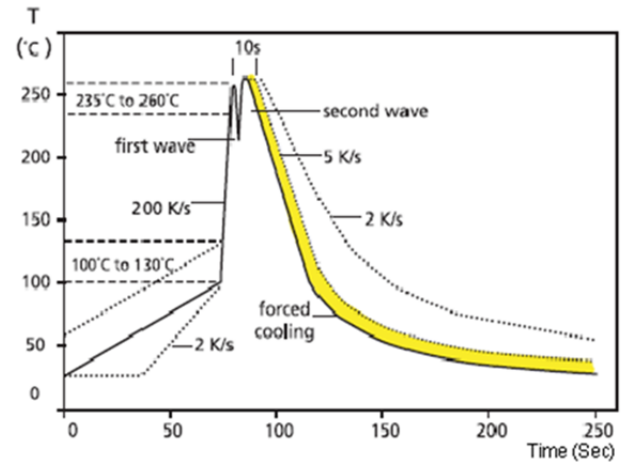

Recommended double-wave Soldering Profile


Typical values (solid line)

Process limits (dotted line)

10.1.3 Soldering Iron: temperature  $350^\circ\text{C} \pm 10^\circ\text{C}$  , dwell time shall be less than 3 sec.

10.2 Recommend Land Pattern:

When a component is soldered, the resistance after soldering changes slightly depending on the size of the soldering area and the amount of soldering. When designing a circuit, it is necessary to consider the effect of a decrease or increase in its resistance.

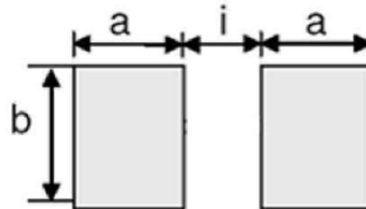

Type	Maximum Power Rating (Watts)	Resistance Range (mΩ)	Dimensions - in millimeters		
			a	b	i
0508	1.00	2~4	0.45	2.20	0.55
0612	1.00	1~4	1.65	3.50	0.5

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**



**ACMH Series Wide Terminal Metal Alloy  
Low-Resistance Resistor Product  
Specifications**

<b>Document No.</b>	<b>IE-SP-101</b>
<b>Released Date</b>	<b>2021/01/01</b>
<b>Page No.</b>	<b>11</b>

10.3 The characteristic of Fe/Cr/Al alloy material:

Because of including magnetism, inductor will be generated under high frequency circuit then to cause value shift and influence customer application. If there is related application shall be noted especially or discuss with original factory.

10.4 Environment Precautions:

This specification product is for general electronic use, ABCO will not be responsible for any damage, cost or loss caused by using this specification product in any special environment. If other applications need to confirm with ABCO.

If consumer intends to use our Company product in special environment or condition (including but not limited to those mentioned below), then will need to make individual recognition of product features and reliability accordingly.

- (a) Used in high temperature and humidity environment
  - (b) Exposed to sea breeze or other corrosive gas, such as Cl<sub>2</sub>、H<sub>2</sub>S、NH<sub>3</sub>、SO<sub>2</sub> and NO<sub>2</sub>.
  - (c) Used in non-verified liquids including water, oil, chemical and organic solvents.
  - (d) Using non-verified resin or other coating material to seal or coat our Company product.
- After soldering, it is necessary to use water-soluble detergents to clean residual solder fluxes, even though no-clean fluxes are recommended.

10.5 Momentary Overload Precautions:

The product might be out of function when momentary overloaded. Please make sure to avoid momentary overloading while using and preserving ◦

10.6 Operation and Processing Precautions:

- (a) Avoid damage to the edge of resistor and protective layer caused by mechanical stress.
- (b) Handle with care when printing circuit board (PCB) is divided or fixed on support body, because bending of printing circuit board (PCB) mounting will make mechanical stress for resistors.
- (c) Make sure the power rating is under the limit when using the resistor. When power rating is over the limit, the resistor will be overloaded. There might be machinery damage due to the climbing temperature.
- (d) If the resistor will be exposed under massive impact load (shock wave) in a short period of time, the working environment must be set up well before use.
- (e) Please make evaluation and confirmation when the product is well used in your company and have a through consideration of it's fail-safe design to ensure the system safety.

<b>Remark</b>	IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED..	Issue Dep. <b>DATA Center.</b>
	Do not copy without permission	Series No. <b>60</b>



**ACMH Series Wide Terminal Metal Alloy  
Low-Resistance Resistor Product  
Specifications**

Document No.	IE-SP-101
Released Date	2021/01/01
Page No.	12

**11 Storage and transportation requirement:**

- 11.1 The temperature condition must be controlled at  $25\pm 5^{\circ}\text{C}$ , the R.H. must be controlled at  $60\pm 15\%$ . The stock can maintain quality level in two years ◦
- 11.2 Please avoid the mentioned harsh environment below when storing to ensure product performance and its' weldability. Places exposed to sea breeze or other corrosive gas, such as  $\text{Cl}_2$  、  $\text{H}_2\text{S}$  、  $\text{NH}_3$  、  $\text{SO}_2$  and  $\text{NO}_2$ .
- 11.3 When the product is moved and stored, please ensure the correct orientation of the box. Do not drop or squeeze the box. Otherwise, the electrode or the body of the product may be damaged.

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Do not copy without permission

Issue Dep. **DATA Center.**

Series No. **60**



**ACMH Series Wide Terminal Metal Alloy  
Low-Resistance Resistor Product  
Specifications**

**Document No.**

**IE-SP-101**

**Released Date**

**2021/01/01**

**Page No.**

**13**

**Legal disclaimer**

ABCO, its distributors and agents (collectively, "ABCO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. ABCO may make changes, modifications and/or improvements to product related information at any time and without notice.

ABCO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, ABCO disclaims (i) any and all liability arising out of the application or use of any ABCO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

ABCO defined this product is for general electrical use , not design for any application for automotive electrical ,life-saving or life support equipment, or any application which may inflict casualties if ABCO product failure occurred. When consumer is using or selling products of ABCO without having discussion with the sales representatives and specifically stated the applicability mentioned above in a written form, then the client need to take a full responsibility and agree to protect ABCO from punishment and damage.

Information provided here is intended to indicate product specifications only. ABCO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by ECN.

**Remark**

IT'S NOT UNDER CONTROL FOR PDF FILE  
PLS NOTE THE VERSION STATED..

Issue Dep.**DATA Center.**

Series No. **60**

Do not copy without permission